

ANNUMBER OF THE SAFETY EQUIPMENT CATALOG IMMUNICIONE





hounded in 1977, Brauner Equipment Company has been providing exemplary service to the roofing community for 34 years. We take great pride in what we sell and guarantee superior customer service We are committed to providing you with the highest quality roofing and sheet metal products available.

to ensure that your business has the tools it needs to be more productive and compete more effectively. One of our primary concerns is safer operations for your employees and work site; we stock a wide selection of OSHA certified equipment that promote safe roofing practices among your employees.

If you have any problems with your equipment down the road, we are also an authorized repair facility for much of the equipment we sell including Garlock and Leister. We have four locations along the East Coast, with offices in Maryland, Virginia, and Pennsylvania.

To see our entire equipment catalog just mouse over the main categories at the top of the page. Each category is split into sub-categories to make navigation easier. If you can't find a particular piece of equipment you're looking for please contact us and we will do everything we can to find the best solution to your problem.



330 south dukeland st, baltimore, md 21223 800-289-2320



106 pennsylvania avenue, virginia beach, va 23462 800-759-2320



2949 grand avenue, pittsburgh, pa 15225 800-797-2320




TABLE OF CONTENTS

Mobile Fall Protection	1
Perimeter Barriers	2
Individual Fall Protection	7
Safety Apparel	9
Miscellaneous	10

We're online in a big way.

Visit us at our new website.

HTTP://WWW.BRAUNEREQUIPMENT.COM/

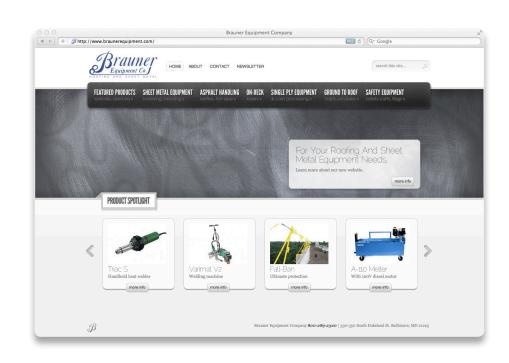

FEATURED MANUFACTURERS





































Mobile Fall Protections Systems designed for protection when working on a leading edge.



Two-man Cart

One man fall arrest, one man fall restraint.

The Two-Man Cart

It's perfect for your two-man metal crew and setting up a Motion Stopping System. This Cart is capable of arresting the fall of one 310 lb worker while restraining one other.

The modular design of the Two-Man Cart makes it easy to load into a truck as well as fit through doorways and into elevators. While the attachable 90 lb weights make sure one person can load and unload the cart with ease.

Provides a secure OSHA compliant mobile anchorage that moves along with the workers.

The Details

Length (less handle) - 50", Width - 50", Height 16", Weight - 600 lbs Counterweights - (6) 90 lbs

Fall Arrest Rating - (1) Person, Fall Restraint Rating - (1) Person



Multi-Man Cart

Three man fall arrest, two man fall restraint.

The Multi-Man Cart

It's the perfect anchorage solution for multiple workers exposed to fall from height hazards. This system is designed for up to (3) persons working at a leading edge for fall arrest and (2) persons rigged for fall restraint - all simultaneously.

Many job sites or flat-roofed facilities lack OSHA compliant tie-off points for workers doing leading edge work. Using sub-standard anchorages like vent pipes, or air conditioners, places workers at extreme risk - liability for the contractor or building owner is equally high. The Two-Man and Multi-Man Carts solve this problem.

Both the Two-Man Cart and the Multi-Man Cart do not require mechanical anchorage into the substrate, which means no penetrations, leaks or damage to sensitive surfaces.

The Details

Length (with handle) - 102", Width - 59", Height 48", Weight - 1000 lbs Deck Space - 25"x40", Toolbox - 16 cu ft

Fall Arrest Rating - (3) Persons, Fall Restraint Rating - (2) Persons




Suitable Substrates (Both Carts)

Built Up Roofing System Metal Decks 20-22 ga Adhered Plywood - Hardwood Decking Adhered ISO - EPS - Gypsum Decking 4000 psi Lightweight Concrete



PR-600 MOBILE FALL PROTECTION SYSTEM

The PR-600 Mobile Fall Protection System was designed to be used on top of flat roofs. Three works can be tied off at the same time to the same unit, two for fall arrest and one for travel restraint. This unit clamps to any standard roofing trailer, which allows the unit to be moved easily along the roof's top by simply pulling the trailer to the desired working location.




PR-20 EAVE CATCHGUARD

The PR 20 Eave Catchguard is an easily installed guardrial for steep roofs that controls debris on those steep roof tear offs. The fastening bracket is slotted like a common roof jack, allowing the new roofing material to be installed right over the bracket.

Spike that bracket to a rafter with 5 - 20 penny nails and place the bracket and stanchion every 8 feet (USA) or 6 feet (CDN). The PR 20 can be installed with existing gutter in place, and allows drip edge to be installed under bracket.

The PR 20 Catchguard System was tested to withstand fall impacts which exceed OSHA and WCB standards, making it safe for workers on the roof and on the gound.



PR-100 SAFETY RAIL SYSTEM

The PR 100 Guardrail System for that flat roofs is comprised of a stanchion and a compression bracket. Also available are two separate mounting brackets to fit different applications.

It will allow man and equipment to work up to the edge. The standard bracket is the Compression Bracket which will calmp to a parapet up to 14" wide. If the parapet is wider than 14", extensions are available to fit any width.


The Stanchion has a guide welded on the side that will slide along the tube on the Compression Bracket, in toward the all and a spring-loaded pin will lock into place. Two men can easily set up 100 Ft. of the guardrail in 25 minutes. The system does not have to be dismantled to intalled flashing and coping.

PR-2000 SAFETY PLATFORM

The PR 2000 Safety platforms meets the OSHA requirements, eliminating the needs for tie-off and a work platform that increases productivity and job quality, saving time and money. The PR 2000 Bracketed Scaffold was tested to 4700 Lbs of downward load.

The PR 2000 exceeds OSHA and Canadian W.C.B. compliance as a catch platform, maing the system the only means of fall protection required for your roofing project.


When using the PR 2000 on you roofing project, you will find that it will speed up production by controlling falling debris on those steep roof tear offs, minimizing ground clean up and ground damage. The system will give you a strong stable working platform from the beginning to the end of the project without interfering with a roofing work, soffit fascia, gutters or cornice work. A safe working environment is created and loading material onto steep roofs is made easier with the use of the PR 2000. The system allows for the installation of gutters with a roof flange. Corner units are also available.

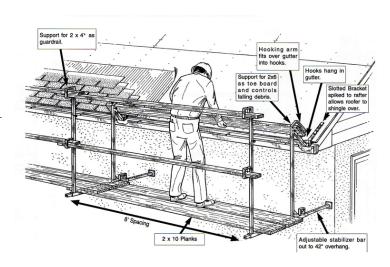



A "DO-IT-ALL" FALL PROTECTION SYSTEM.

Fall-Ban sets up fast, gets out of your way, and doesn't cost an arm and a leg. Now you can work in the 6 foot OSHA zone without being tied off.



ENDLESSLY DYNAMIC, INCREDIBLY EFFICEN



Cables moves freely around corners with clip-on rollers.



Unused cable remains on spool at end of cable run. No need to cut cable - ever.



Simple ratchet pullers tension cable around the entire system.



Mid-rail cable supports hold cable a proper height between stanchions.

STORE IT ALL IN THE FALL-BAN CART.

Holds complete 400 foot system



AN ADAPTABLE, EFFICIENT SOLUTION.

Easy setup - 120 ft an hour. Only power drill and wrench needed. Works on a large variety of building structures. OSHA Compliant.



flat commercial job.



Stanchion rigged for overhang roof or gutter.



Stanchion rigged for parapet wall.



VERSATILE AND STURDY

The Railguard 200 system can be assembled or taken down in minutes. No holes need to be drilled and no tools are necessary for setup. The system can withstand the force of a 200 lb man without budging. The Railguard 200 is perfect for use as construction safety equipment.

There are multiple guard railing lengths available along with swinging gates, transport carts, custom paint colors and finishes

Railguard 200 has been tested by 3 separate and nationally recognized testing firms and has been approved to meet or exceed OSHA fall protection standards.

CONTACT US TO LEARN MORE ABOUT THE RAILGUARD 200'S ADD-ONS.

As versatile as you want it to be.

SETUP IS SIMPLE

The Railguard 200 consists of three components:



Base Plates provide the mounting for the rail sections and the 200 lb resistance required by OSHA. Holds up to 4 intersecting rails and allows 45 or 90 degree turns



Rail Sections are 42" high and are available in three standard sizes of 10', 7'6", and 5' lengths. Custom sizes available.



Base Plates secure the railing to the base. Simply slide the pin into the hole and clip it, leaving the Railguard 200 System straight, rigid, and secure.



- A 5' Outrigger System
- B Danger Side Railings
- C Extra Base Plate
- D Quick Pin
- E Optional 2" x 4" toeboards



The **Base Transport** is an invaluable piece when frequent repositioning of bases is required. Heavy bases can be moved easily with this simple carrier.



Both self-closing and manual model gates have a support wheel on one end and come in multiple sizes.



The CageGuard Protector is the perfect fast-install, low-cost solution to guarding skylights.



Roof opening protection is available in kits to fit roof hatches, scuttle openings, stairway hatches and equipment hatches.



Railguard 200 qualifies as a motion stopping safety railing and can be used right on the roof edge for effective fall protection.



Base pads available to help protect the substrate and provide added skid resistance on smooth-surface applications.



Hand Hook used for final positioning of the bases. Just hook the base and give it a tug.



Centurion Service Cart available to efficiently store and transport up to 7 rail sections, 8 bases, and 14 toeboards.



Sky-Dome Skylight Life Protector is one more solution from Garlock Safety Systems that allows companies and contractors the ability to install a comprehensive skylight guarding solution in a matter of minutes. This ultra low-cost solution is completely free-standing, non-penetrating and lightweight.



Convert any RailGuard 200 portable railing system into an **Invisi-Rail** railing system. With our simple bolt-on adapter Invisi-rails folds down to only 8" above roof. No one from the ground will ever know you have guarding in place. When technicians need to service the equipment they simply fold to the upright position.

GUARDIAN: THE GARLOCK FOLDING WARNING LINE SYSTEM.

Protect your employees and visitors from dangerous situations with easy to use, portable Guardian Warning Lines. Each Guardian Warning Line System includes (3) stanchions and 100' of nylon corded line and flags. The system acts as a visual warning, sets up in minutes and is OSHA compliant.

The Garlock Folding Warning Line System features the convenience of a portable, hand-carried warning line system for quicker set-up and dismantling. The compact design makes installation easy once in the right position simply unfold the legs and stanchion and hook up the flags.





Guardian Warning Line Systems are totally portable and set up in minutes. They're a simple and affordable way to help protect employees and visitors from dangerous areas around your facility, jobsite or roof.

- Stanchions are 39-1/2" high, have a 48" x 45" footprint and can be anchored in place (if desired).
- Flagged line is heavy-duty nylon cord rated at 657 lbs tensile strength.
- Large, yellow, doublestitched, super-tough flags spaced every 5 feet.
- Meets all OSHA regulations.



Optional rubber feet for metal decks.

Guardian Transporters

let you easily roll a complete 300 foot warning line system wherever it's needed! - Holds (9) stanchions securely in pleace.


- Built-in lifting ring for hoisting to a roof.
- Works with Garlock folding warning line systems you already own.
- Transporter and complete 300 foot system weighs only 465 lbs






Built-in reel holds 300' of flagged line.







BASIC RAIL SYSTEM

- Temporary perimeter guardrails.
- Lightweight and stores easily.
- Pivotable feet adjust from flat too 16/12 sloped surfaces.
- Can be installed anywhere on the roof
- Easy installation and removal by one person.
- Durable powdercoat paint finish.
- Complies with all applicable OSHA safety standards.
- All parts are compatible with several other guard rail systems. Contact us for more information.

ROOFER'S RAIL SYSTEM

- Temporary perimeter guardrail system.
- Adjusts from flat to 16/12 sloped surface.
- Works on shingled roofs.
- Easy installation and removal.
- Acts as a debris catch for shingle removal.
- Complete all roofing installation with system in place.
- Durable powdercoat finish.
- Can be installed eight feet apart.
- Easily converts to the Basic Rail application.

C-CLAMP SYSTEM

- Our premium heavy duty c-clamp is the most popular and still second to none.
- The most versatile and innovative guardrail system on the market.
- Works on wood, concrete and brick.
- Expands from 7" to 12" [custom sizes availabe.]
- Easy installation and removal.
- Complies with applicable OSHA standards.
- Can be installed eight feet apart.
- Workers do not have to lean over parapet walls to install.





Assembles quickly from inside of the parapet, the guardrail post is always on the inner side of the parapet wall to meet OSHA height regulations.

This roof bracket comes with a post holder and the post to hold two 2×4's with brackets placed 6' on center, the bracket can adjust from 4" to 24".



ORANGE SAFETY FENCE

4' x 100' high visibility orange safety fence with 100% high density polyethylene. Incredibly strong yet light and flexible due to special extruding and stretching process.



PENNANT FLAGS

Replacement pennant flags are attached to a 10' line with a 500 lb tensile strength, all flags are 12" x 18" and have 48 flags per 100' line. Available in both red and yellow.



ROOFER'S FALL KIT

The Roofer's Fall Kit comes standard with:

- Full body harness with a single D-ring
- Mating buckle legs and lanyard keeper
- 5/8" x 50' long-life vertical lifeline with double-locking snap hook
- 3' softpack lanyard with 5/8" manual rope grab
- Single-use roof peak anchor
- Packed in a 5 gallon bucket.



ROOFER'S FALL KIT (MULTI-USE BRACKET)

This kit contains everything the roofer's fall kit contains except it has a multiuse bracket instead of a single-use roof anchor.



CONSTRUCTION PLUS KIT

The Construction Plus Roofer's Fall Kit contains:

- D-ring full body harness
- CP+ Lifeline with double locking snaphook and thimble eye
- 5/8" rope grab with attached 3" web lanyard
- Re-usable roof anchor and a carry-all bucket
- Packged in a 5 gallon bucket.



NIGHTHAWK KIT

The Nighthawk Roofer's Fall Kit contains:

- One D-ring Nighthawk harness with a sliding D-ring at the center of the back
- 50' Hawkline Lifeline with rope grab
- 2' shock absorbing lanyard
- Single-use roof anchor with fasteners
- Packaged in a 5 gallon bucket.



SELF RETRACTING LIFELINE

Self Retracting Lifelines are available in 20', 25', 30', 50', and 60' lengths. All come with galvanized or stainless steel cables and aluminum housings.



PERMANENT ROOF ANCHOR

Permanent Roof Anchor has a double d-ring design for both sides of the roof peak. Stainless steel construction with zinc-plated d-rings, uses 10ea 16d framing nails driven through the sheathing and a truss.







SINGLE-USE ROOF ANCHOR

The single-use roof anchor conforms to any pitch roof, installs easily into trusses, required 14ea 16d nails. Use once and hammer over. Fully rated at 5000 lbs.

HINGED RE-USABLE ROOF ANCHOR

The Hinged Re-usable Roof Anchor is easily installed and removed from trusses or sheathing. It's economical because it can be used over and over again. Meets all OSHA and ANSI requirements and is rated for 5000 lbs.

STANDING SEAM ROOF ANCHOR

- Adjustable for metal roof seams (24" 30" – 32" – 36")
- Installs easily on sloped or flat roofs
- Retractor swivels 360 degrees
- Fits numerous manufacturers' fall blocks (up to 50 FT maximum)
- Meets OSHA Standards



TWO-WAY UNIVERSAL STANDING SEAM CLAMP

- Lightweight, reusable, easy to use
- Durable, all steel construction with zinc electroplate finish
- Unique, reversible design allows for seams up to 1" wide
- MR-24, VSR or similar profiles can be covered with one clamp. Use on clips anywhere on the completely seamed and attached roof sections, not closer than 4 ft. from the edge

NOTE: Do not use with horizontal lifelines. Designed for single point tie off anchor only.



RESQUE CORD SYSTEM ENERGY-ABSORBING WEB LANYARDS

1-1/4" X 6' / NoPac® resque™ CORD System Energy-Absorbing Lanyard, Zsnaphook ea. end

800-289-2320



PROTECTIVE PITCH HOOD

Protective pitch hoods eliminate skin irritation and pitch burns. Made of breathable Dacron material that thoroughly protects workers from pitch fumes.



HARD HAT WITH POLYETHYLENE SHELL

Hard hat with a tough polyethylene shell. Strong, lightweight, and durable. The hard had features an adjustable nylon suspension for shock absorbing protection, along with slotted sides to accommodate accessories.workers from pitch fumes.

We also carry hard hat adapters, face shields, and safety vests.

SAFETY GOGGLES

We carry a large assortment of safety goggles. Following are some of the variations we offer.















WORK GLOVES

Varieties include: cotton, leather, latex palm coated, and PVC chemical resistant.









SAFETY MISCELLANEOUS







FIRST AID KIT

25 man first aid kits available with a plastic or metal storage box.

RESPIRATOR

Respirators have a patented one-way valve for easy exhalation and cool, dry comfort. Advanced electrostatically charged micro-fibers also make breathing easier and cooler.

PITCH GEL & CREAM

Pitch gel is designed to be applied each day just before work to make clean-up later a breeze. No more embedded tar, grease, oil, and dirt to dig out of your skin. Protects the skin from irritation and pitch burns.

You can also use Pitch Cream as an after wash cream to protect, soothe, and refresh your skin.



ROOFER'S BURN KIT

This roofers burn kit has been assembled as a temporary relief and first aid kit for various burns incurred by roofers handling or working with hot asphalt, pitch, or open flame products.



ORANGE SAFETY CONE (AND HOT ASPHALT WARNING SIGN)

Measures 29" in height.

Optional "Hot Asphalt" warning sign can attach to the top of the cone



YELLOW CAUTION TAPE

Yellow caution tape in 3" by 1000' rolls.

800-289-2320

